


TECHNICAL DATA SHEET: QUICK-FIT (QF) BALL JOINT

Ø mm	Rolled Edge (nom. mm)	L mm	Galvanised Steel Thickness mm	Weight kg
100	6	280	1,0	2,1
125	6	295	1,0	3,8
150	6	315	1,0	3,9
180	8	360	1,0	4,5
200	8	360	1,0	5,0
250	8	350	1,0	9,0
300	10	420	1,0	9,3

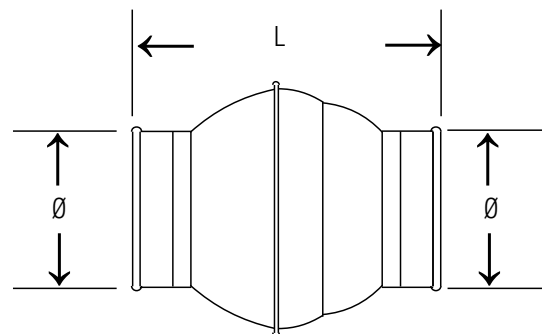

Ends: QF (Quick-Fit rolled edge).

Additional Notes

To have movable connection between duct and PU-Hose. The ball joint could turn 360° and angeling 22° from centerline.

Recommended max. service temperature is +80°C.

Compliance / Rating of Product Components

Product	Material	Compliance / Rating
QF Ball Joint	Galvanised	DX51D with Z275 Coating

Temperature Rating of Product Components

	Quick-Fit (QF) Ball Joint
80°C	Galvanised Steel
-20°C	

